

VERSION: 1.3



Manpack Wideband High-Power Antenna

500 – 6000 MHz Product Code: OMNI-A0265-01

SPECIFICATIONS:

Electrical:	
Frequency range	500 – 6000 MHz
Gain	0 dBi typical (in band)
Azimuth pattern	Omni, 3 dB ripple
Elevation pattern	Narrow beam
Polarisation	Vertical
Nominal impedance	50 Ω
VSWR	< 2:1 or better
Power handling:	See graph below
Connector	7/16-type male at base
Groundplane requirements	Groundplane independent
Mechanical:	
Dimensions (I x d)	527 mm x 83 mm
Total mass	< 1kg
Mounting	On 7/16-type connector at base
Colour	Black, others on request
Environmental: designed to meet the following specifications	
Temperature range	Storage: -41 °C to +71 °C.
	Operation -31 °C to +55 °C
Weatherproofing	IP65 water resistant
	(when connector is properly fastened)
Exposed materials	Painted e-glass
	Anodized aluminium
	E-coated steel

PRODUCT FEATURES:

- Omni-directional wideband antenna
- Communications or signal
 interception
- Covers all handheld wireless bands

PRODUCT OVERVIEW:

This wideband antenna is for interception of wireless communications. It is mounted on a 7/16 connector at the base of the antenna. The fibreglass tube contains the groundplane independent radiator

The array covers the GSM 900, PCS, UMTS/3G/LTE and Wi-Fi (both bands).

Updated 2022-09-22

sales@alaris.co.za www.alarisantennas.com

GAIN THE ADVANTAGE

Manpack Wideband High-Power Antenna


<u>500 – 6000 MHz</u>


Product Code: OMNI-A0265-01

VERSION: 1.3

Simulated VSWR and gain graphs:



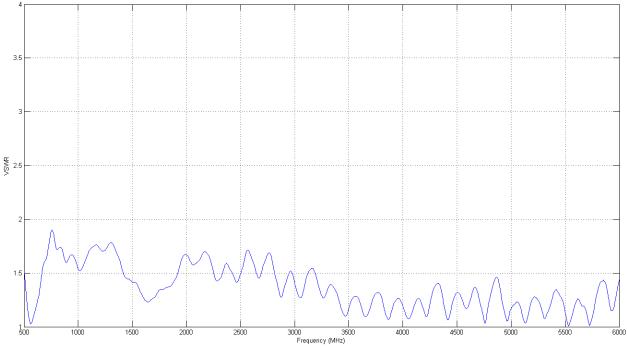

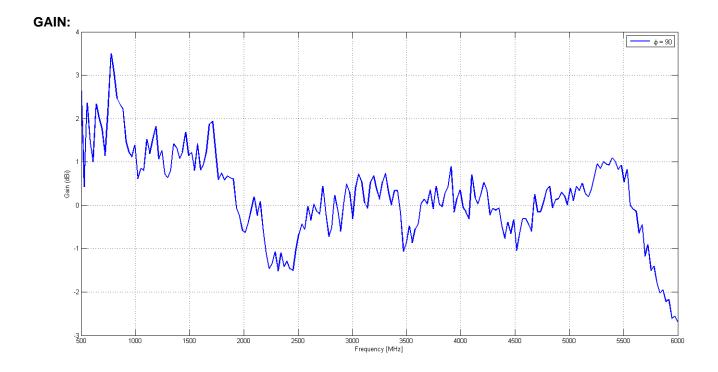

GAIN THE ADVANTAGE

Updated 2022-09-22

sales@alaris.co.za www.alarisantennas.com

PAGE 2 of 3


Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice

Manpack Wideband High-Power Antenna

500 – 6000 MHz Product Code: OMNI-A0265-01


VERSION: 1.3

Power Handling:

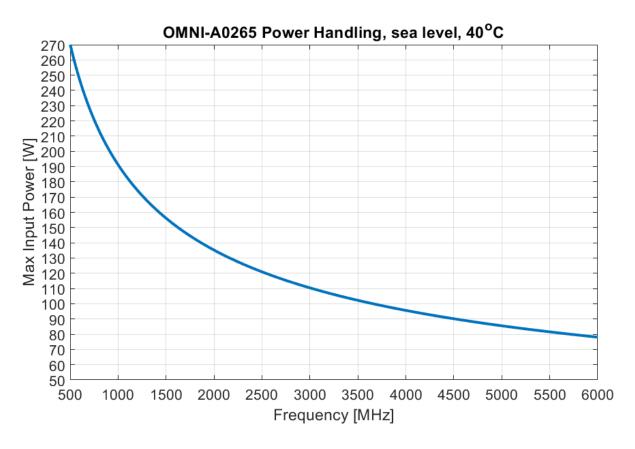

Updated 2022-09-22

sales@alaris.co.za www.alarisantennas.com



Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice