

High-Power LPDA Antenna

400 – 6000 MHz

Product Code: LPDA-A0141

VERSION: 1.1

SPECIFICATIONS:



Electrical:	
Frequency range	400 – 6000 MHz
VSWR	< 2.0:1
Nominal input impedance	50 Ω
Connector	N-type female
Feed power handling	150 W @ 6000 MHz
Gain (typical)	8 dBi
E-plane 3 dB beamwidth	50°
H-plane 3 dB beamwidth	60°
Polarisation	Linear
Front-to-back ratio	≥ 15 dB
Mechanical:	
Dimensions (w x l)	450 mm x 770 mm (incl. bracket)
Material	Aluminium, stainless steel, fibreglass
Total mass	3.7 kg (incl. mounting bracket)
Mounting method	4 x M8 Bolts
MTBF	500,000 h
Environmental: designed to meet the following specifications	
Wind survival	160 km/h calculated
Operating Temperature	-30°C to +65° (no icing)
Storage Temperature	-40°C to +85°
Corrosion	Designed for MIL-STD-810F MIL-1250A

PRODUCT FEATURES:

- Wideband frequency 400 to 6000 MHz
- VSWR < 2.0:1
- High gain: 8 dBi
- Rugged construction
- Ice resistant

PRODUCT APPLICATIONS:

- Wideband
- High-Power

PRODUCT DESCRIPTION:

The LPDA-A0141 directional log-periodic dipole array (LPDA) is primarily designed for high-power applications. It covers a frequency band of 400 to 6000 MHz with a gain of greater than 8 dBi.

The antenna is completely encapsulated in a radome. The antenna is provided with a mounting bracket.

High-Power LPDA Antenna


400 – 6000 MHz

Product Code: LPDA-A0141


VERSION: 1.1

VSWR AND GAIN GRAPHS:

Typical VSWR:

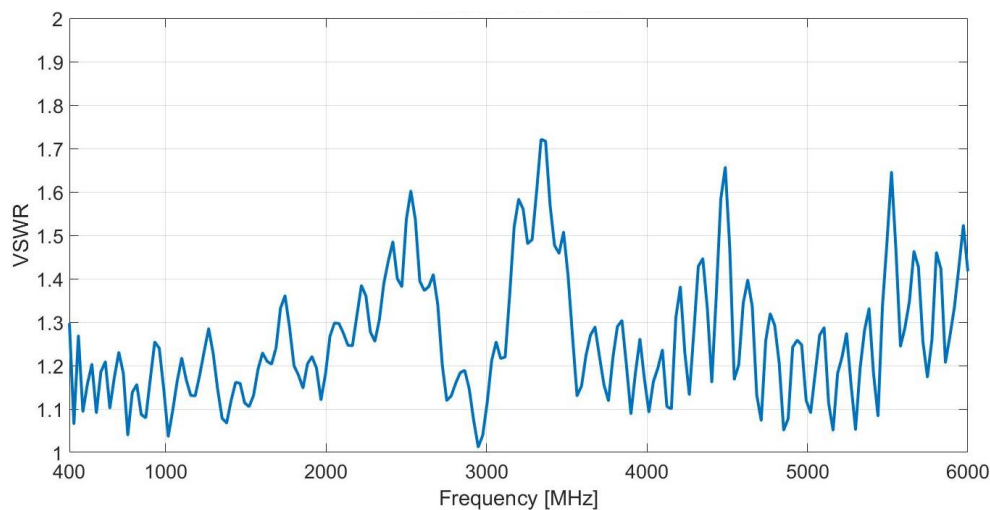

GAIN:

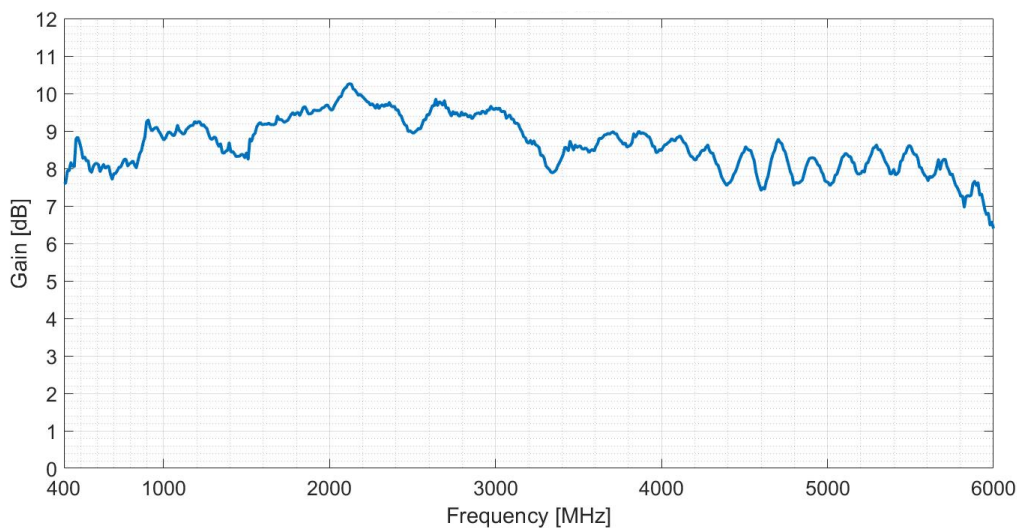

High-Power LPDA Antenna

400 – 6000 MHz

Product Code: LPDA-A0141

VERSION: 1.1

RADIATION PATTERNS:

