

Active Monitoring Antenna

VERSION: 3.7

9 kHz – 300 MHz

Product Code: OMNI-A0112

SPECIFICATIONS:



Electrical:	
Frequency range	9 kHz – 300 MHz
VSWR	< 2.5:1
Feed power handling	Receive only
Nominal input impedance	50 Ω
Connector	N-type female
Polarisation	Vertical
Pattern	Omni-directional
Power supply	Via RF cable 12 – 24 V DC
Amplifier gain	22 dB at 300 MHz
Amplifier IP3	> 37 dBm typ.
Mechanical:	
Base (d x h)	140 mm x 600 mm
Weight	< 2 kg
Environmental: designed to meet the following specifications	
Wind survival	160 km/h
Temperature range	Storage: -30°C to +70°C Operation -30°C to +55°C
Humidity	MIL-STD-801F Test 507.4 Storage: 0% to 95% RH Operation: 0% to 95% RH
Water ingress rating	IP65

PRODUCT DESCRIPTION:

The OMNI-A0112 is an active monopole whip antenna designed for easy mounting on vehicles and structures with a groundplane. Power for the active components is supplied via the RF cable.

PRODUCT FEATURES:

- 9 kHz to 300 MHz frequency range
- Good IP3
- Suited for vehicle-mount applications

APPLICATION:

- HF/VHF monitoring


Active Monitoring Antenna

9 kHz – 300 MHz


Product Code: OMNI-A0112

VERSION: 3.7

Typical VSWR GRAPH:

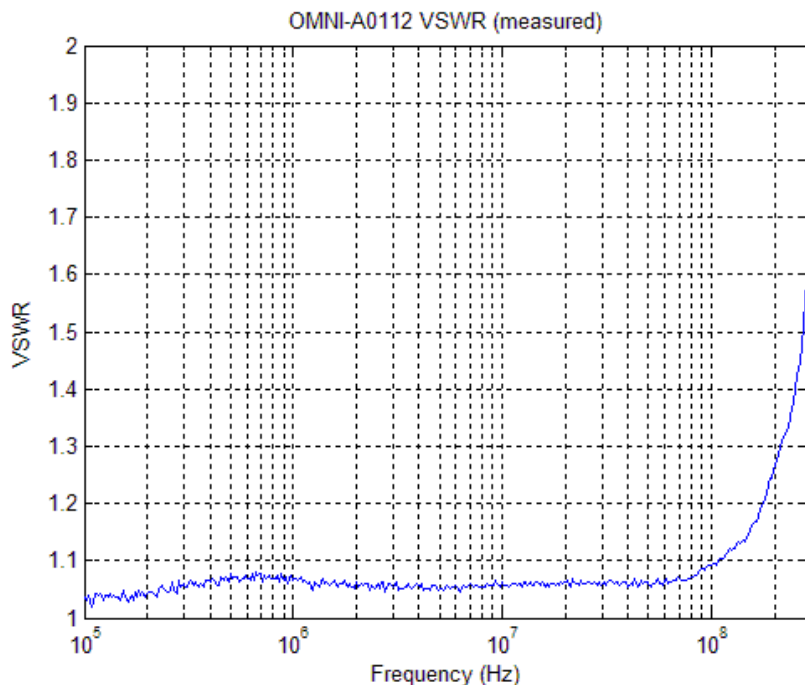

Field strength sensitivity:

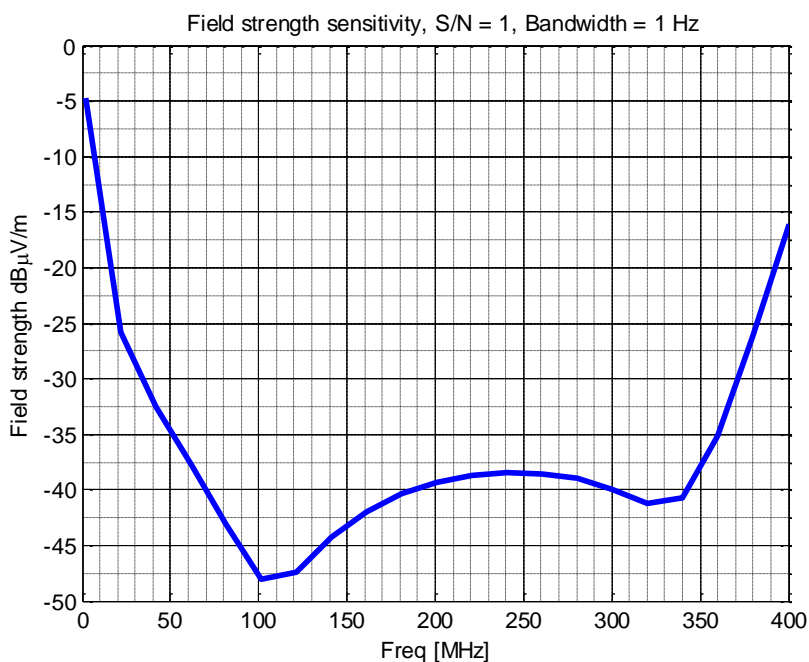

Active Monitoring Antenna

9 kHz – 300 MHz

Product Code: OMNI-A0112

VERSION: 3.7

Measured Gain:

