

## SPECIFICATIONS:

| <b>Electrical:</b>  |                                     |
|---|-------------------------------------|
| Frequency range   | 500 – 1000 MHz                      |
| VSWR  | < 2:1                               |
| Nominal input impedance   | 50 Ω                                |
| Connector   | EIA 1 5/8                           |
| Feed power handling   | 4000 W                              |
| MTBF  | 50,000 h                            |
| Gain (typical)  | > 10 dBi typical                    |
| Polarisation  | Linear<br>(vertical and horizontal) |
| <b>Mechanical:</b>  |                                     |
| Dimensions (w x l)  | 345 mm x 1753 mm                    |
| Total mass  | 7 kg                                |
| Mounting method   | Mast (60 – 100 mm)                  |
| <b>Environmental: designed to meet the following specifications</b> |                                     |
| Wind survival on mast   | 160 km/h (calculated)               |
| Temperature (operational)   | -30 °C to +70 °C                    |
| Water and dust resistance   | IP66                                |

## PRODUCT FEATURES:

- High feed power handling of 4 kW
- Low VSWR
- High gain over the band

## APPLICATIONS:

- Wideband monitoring
- High-powered transmissions

## PRODUCT DESCRIPTION:

The LPDA-A0103 is a directional log-periodic dipole array that is primarily designed for high-powered transmit applications. It covers the frequency band of 500 to 1000 MHz at 4000 W of power, with a typical gain of 9 dBi.

The antenna can be adjusted easily for horizontal or vertical polarisation via a swivel mounting bracket on a mast.

# Very High-Power LPDA


500 – 1000 MHz

Product Code: LPDA-A0103


VERSION: 1.6

## VSWR AND GAIN GRAPHS:

### Measured VSWR:

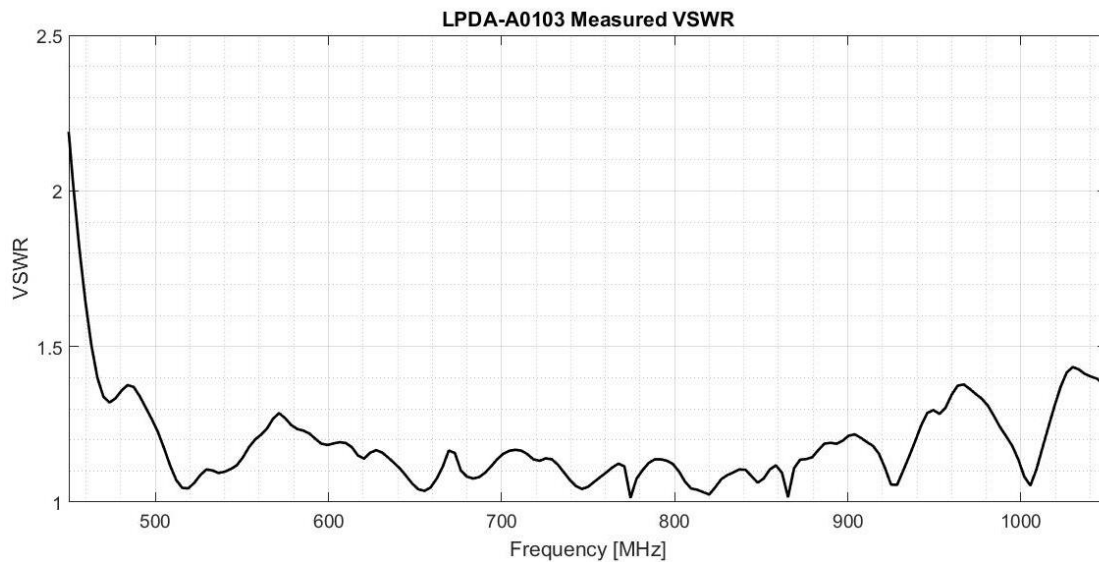

### Measured GAIN:

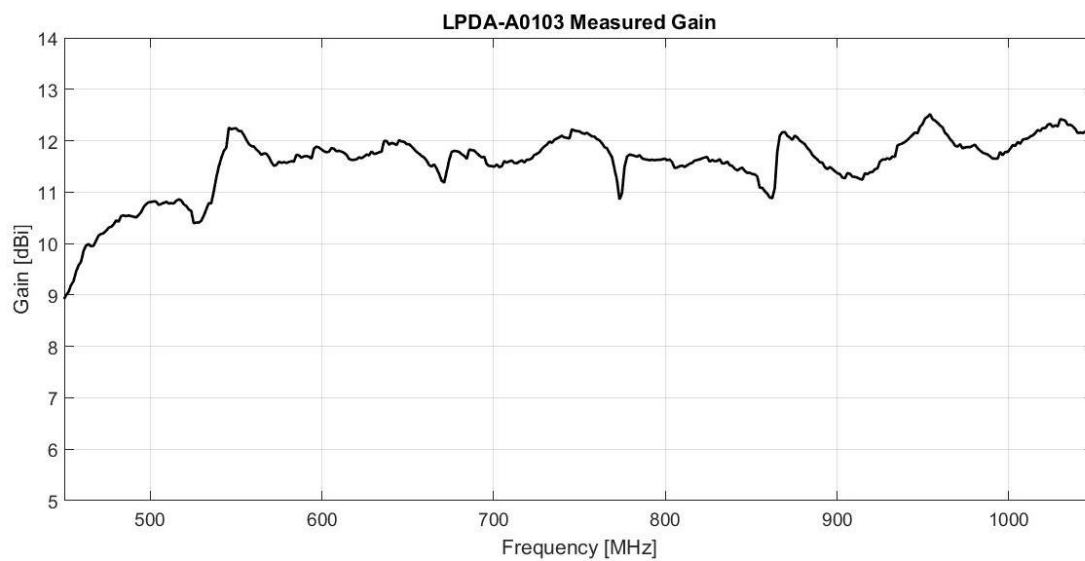

# Very High-Power LPDA


500 – 1000 MHz

Product Code: LPDA-A0103


VERSION: 1.6

## RADIATION PATTERNS:

E-PLANE PATTERN:

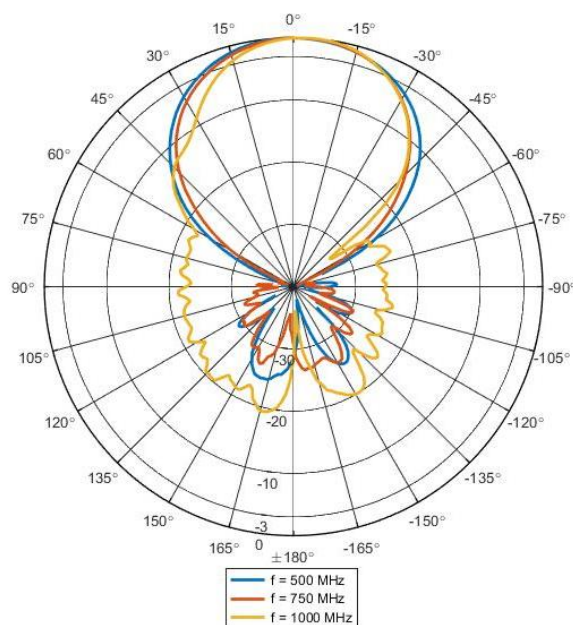

H-PLANE PATTERN:

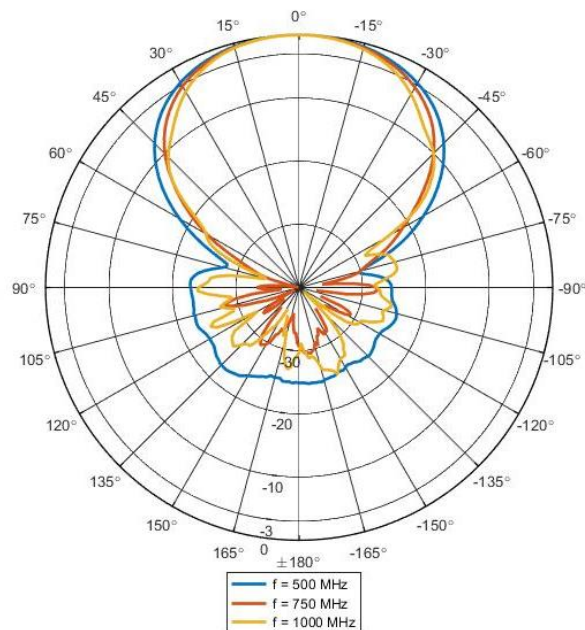

## DIMENSIONS:

