

VERSION: 1.2



Dual Port High-Power LPDA Antenna

400 – 6000 MHz

Product Code: LPDA-A0162

SPECIFICATIONS:

Electrical:	
Frequency range	400 – 6000 MHz
Band A	400 – 1000 MHz
Band B	1000 – 6000 MHz
VSWR	< 2.0:1
Nominal input impedance	50 Ω
Connector	2x N-type female
Feed power handling	100W CW
Gain (typical)	See graph below
E-plane 3 dB beamwidth	
Band A	70° - 100°
Band B	90° - 105°
H-plane 3 dB beamwidth	
Band A	45° - 60°
Band B	50° - 60°
Polarisation	Linear
Front-to-back ratio	≥ 22 dB
Mechanical:	
Dimensions (I x h x w)	625 mm x 710 mm x 160 mm
	(incl. bracket)
Material	Aluminium, stainless steel,
	fibreglass
Total mass	< 5 kg (incl. mounting bracket)
Mounting method	4 x M8 Bolts
MTBF	500,000 h
Environmental: designed to meet the following specifications	
Wind survival	160 km/h calculated
Operating Temperature	-30°C to +65° (no icing)
Storage Temperature	-40°C to +85°

PRODUCT FEATURES:

- Wideband frequency 400 to 6000 MHz
- VSWR < 2.0:1
- High gain: > 7 dBi
- Rugged construction
- Ice resistant

PRODUCT APPLICATIONS:

- Wideband
- High-Power

PRODUCT DESCRIPTION:

The LPDA-A0162 dual port directional log-periodic dipole array (LPDA) is primarily designed for high-power applications. It covers a frequency band of 400 to 6000 MHz with a gain of greater than 7 dBi.

The antenna provides two separate ports for simultaneous transmission in both bands with good isolation between bands.

The antenna is completely encapsulated in a radome. The antenna is provided with a mounting bracket.


Dual Port High-Power LPDA Antenna

400 – 6000 MHz

Product Code: LPDA-A0162

VSWR AND GAIN GRAPHS:

VSWR:

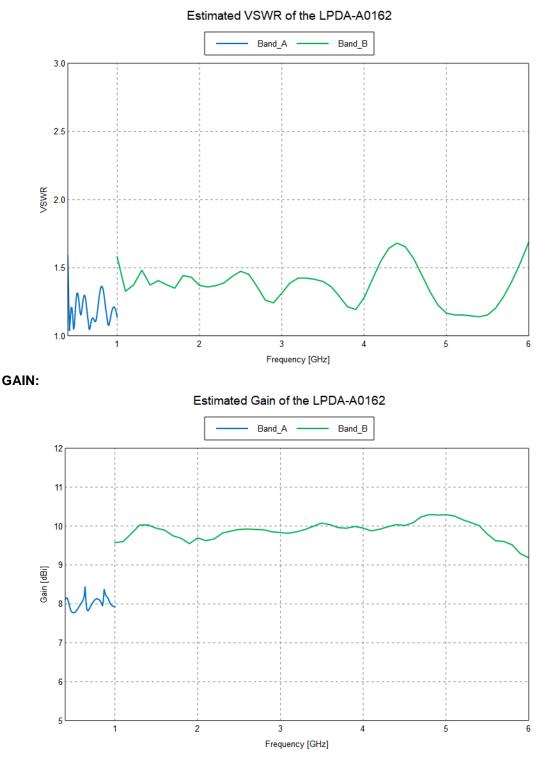

VERSION: 1.2

Dual Port High-Power LPDA Antenna


400 – 6000 MHz


Product Code: LPDA-A0162

RADIATION PATTERNS:

VERSION: 1.2


LPDA-A0162 Band A Estimated Normalised E-plane Patterns





E-plane Band B Patterns - LPDA-A0162





LPDA-A0162 Band B Estimated Normalised H-plane Patterns

