

# 5 GHz Vehicle-Mount Communications Antenna

5200 – 5900 MHz

Product Code: OMNI-A0321

VERSION: 1.1



## SPECIFICATIONS:

<b>Electrical:</b>	
Frequency range	5200 – 5900 MHz
VSWR	< 2:1
Nominal input impedance	50 $\Omega$
Connector	N-type male
Feed power handling	10 W
Gain	See graph
Polarisation	Linear, vertical
Groundplane requirements	Groundplane independent
<b>Mechanical:</b>	
Dimensions (l x d)	700 mm x 35 mm
Base diameter	135 mm
Weight	< 1 kg
Mounting	NATO base flange, 4 and 6 holes
Colour	Black, others on request
<b>Environmental: designed to meet the following specifications</b>	
Wind survival	160 km/h
Temperature range	-40 °C to +85 °C
Water ingress rating	IP66 (when mounted on connector)
Shock and vibration	MIL-STD-810 E 516.4: Vibration category 8, shock 40 g

## PRODUCT FEATURES:

- Wideband
- Omni-directional azimuth pattern
- High-power handling
- Spring-mounted element
- Weatherproof

## PRODUCT DESCRIPTION:

This is a wideband, high-gain, compact communications antenna for use in the 5 to 6 GHz band.

The mechanical design features a sprung connectorized mounting system that protects the antenna against impacts typically endured during rough field use.

The antenna is designed for outdoor use on a vehicle.

# 5 GHz Vehicle-Mount Communications Antenna


5200 – 5900 MHz

Product Code: OMNI-A0321


VERSION: 1.1

## VSWR AND GAIN GRAPHS:

### VSWR:

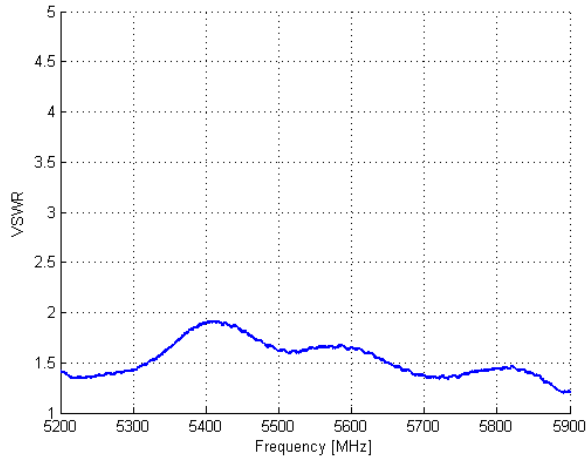


### Gain:

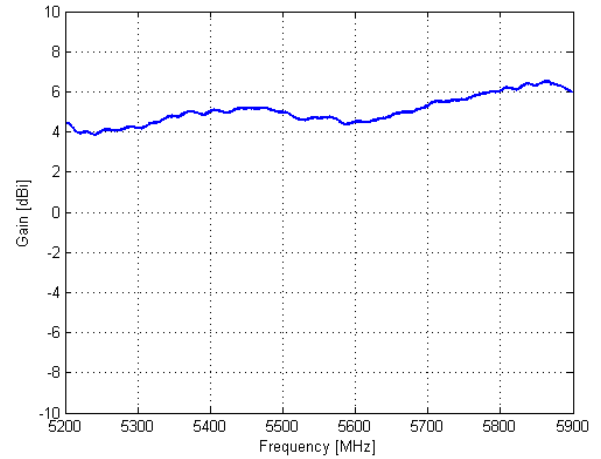

## ANTENNA PATTERNS:

### Azimuth (H-plane):

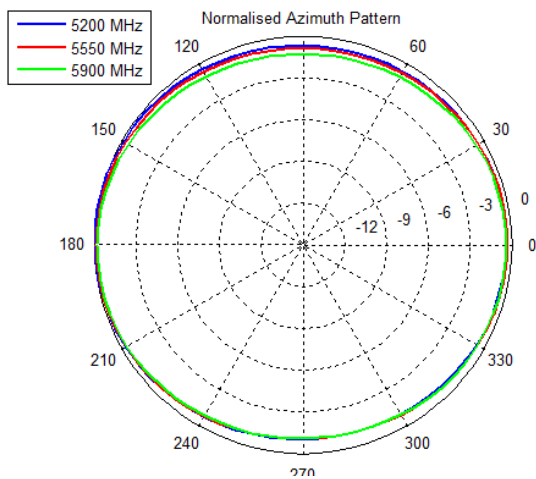

### Elevation (E-plane):

