


VERSION: 3.1



FEATURES:

- Low VSWR and high gain
- High feed power handling
- Vertical and horizontal polarisation
- Easy to assemble and disassemble
- Rugged construction

MECHANICAL FEATURES:

- Rugged
- Quick assembly time: under 10 minutes for two people
- Compact packaging

APPLICATIONS:

- Wideband monitoring
- High-power applications

Wideband LPDA Antenna

100 – 3000 MHz Product Code: LPDA-A0037

SPECIFICATIONS:

Electrical:	
Frequency range	100 – 3000 MHz
VSWR	< 2.5:1
Nominal input impedance	50 Ω
Connector	7/16 female
Feed power handling	500 W
Gain on horison	6 dBi typical
E-plane 3 dB beamwidth	60º typical
H-plane 3 dB beamwidth	110º typical
Polarisation	Adjustable (vertical and
	horizontal)
Mechanical:	
Dimensions (I x w)	1960 mm x 1600 mm
Material	Aluminium, stainless steel
Mounting method	Mast mountable bracket with
	U-bolts
Environmental: designed to meet the following specifications	
Temperature (operational)	- 30 °C to +65 °C
Wind survival on mast	160 km/h (calculated)
Water and dust resistance	IP 65

PRODUCT DESCRIPTION:

The LPDA-A0037 is a directional log-periodic dipole array that covers the 100 to 3000 MHz frequency band.

High-powered unit of 500 W of power up to 1000 MHz with a typical gain of 6 dBi over 90% of the band.

Polarisation is adjustable between vertical and horizontal via a swivel mounting bracket.

This antenna can be customized for various frequencies within this frequency band with excellent gain, VSWR and high-power handling.

Updated 2022-09-14

sales@alaris.co.za www.alarisantennas.com


GAIN THE ADVANTAGE

Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice


Wideband LPDA Antenna

100 – 3000 MHz Product Code: LPDA-A0037

VSWR:




Gain:



VERSION: 3.1

PATTERNS:

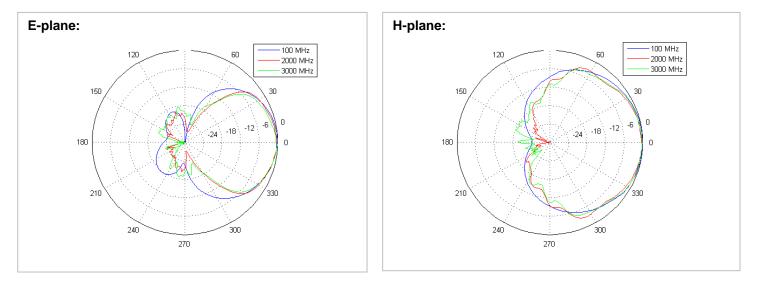

GAIN THE ADVANTAGE

sales@alaris.co.za www.alarisantennas.com

Updated 2022-09-14

Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice

PAGE 2 of 2