

VERSION: 1.4

* Bracket not included

High Power Circular Polarised Antenna

400 – 450 MHz Product Code: SPRL-A0005

SPECIFICATIONS:

Electrical	
Frequency range	400 – 450 MHz
Gain	> 6 dBi typical
Beamwidth	100° (typical)
Polarisation	LHCP
Nominal impedance	50 Ω
VSWR	< 2.0:1
Power handling	700 W CW
Connector	7/16 female
Mechanical:	
Dimensions (d x l)	Ø 500 mm x 875 mm
Total mass	< 15 kg
Colour	Painted on request
Environmental: designed to meet the following specifications	
Temperature range	Storage: -41 °C to +71 °C.
	Operation -31 °C to +55 °C
Weatherproofing	IP 66 water resistant
Exposed materials	Alodined aluminium
	Epoxy glass

PRODUCT OVERVIEW:

SPRL-A0005 is a high power conical spiral, left-hand circularly polarised antenna designed operation in the 400 – 450 MHz band. The antenna provides broad beam coverage without nulls or reduction in performance.

The antenna features a low VSWR and high gain over the operating band with a fibre glass radome to protect the radiator.

PRODUCT FEATURES:

- LHCP antenna
- High power
- Low VSWR



sales@alaris.co.za www.alarisantennas.com

GAIN THE ADVANTAGE

Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice


High Power Circular Polarised Antenna

<u>400 – 450 MHz</u>

Product Code: SPRL-A0005

VERSION: 1.4

ELECTRICAL PERFORMANCE PLOTS:

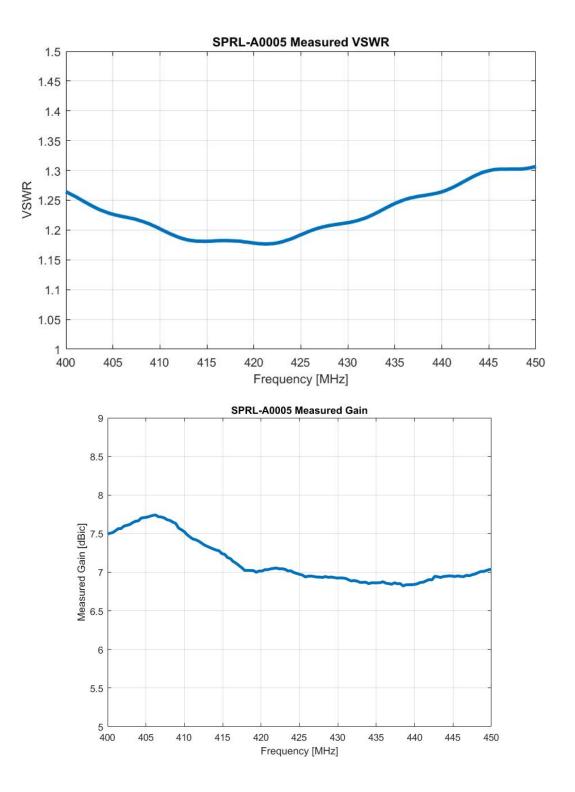

GAIN THE ADVANTAGE

sales@alaris.co.za www.alarisantennas.com

Updated 2022-09-23

Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice


High Power Circular Polarised Antenna

400 – 450 MHz

Product Code: SPRL-A0005

MEASURED RADIATION PATTERNS

VERSION: 1.4

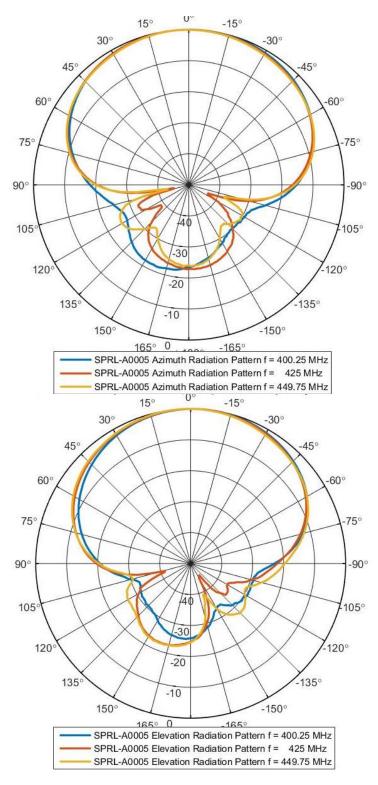

GAIN THE ADVANTAGE

sales@alaris.co.za www.alarisantennas.com


Updated 2022-09-23

High Power Circular Polarised Antenna

<u>400 – 450 MHz</u>

Product Code: SPRL-A0005

VERSION: 1.4

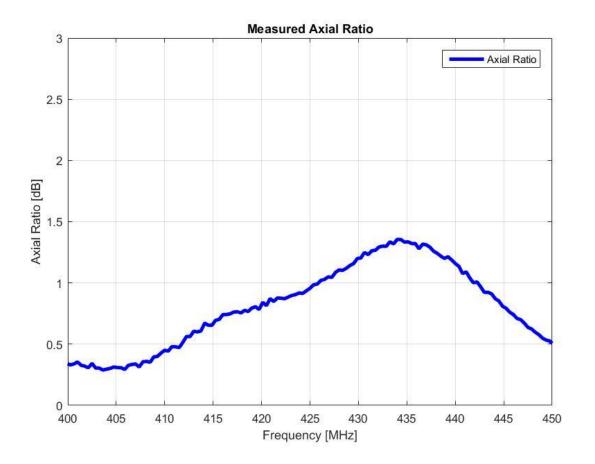

sales@alaris.co.za www.alarisantennas.com

Updated 2022-09-23

Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice GAIN THE ADVANTAGE