

VERSION: 1.1



Tri Port High-Power LPDA Antenna

400 – 6000 MHz Product Code: LPDA-A0167

SPECIFICATIONS:

Electrical:	
Frequency range	400 – 6000 MHz
Band A	400 – 930 MHz
Band B	1160 – 1610 MHz
Band C	2400 – 6000 MHz
VSWR	< 2.0:1
Nominal input impedance	50 Ω
Connector	3x N-type female
Feed power handling	100W CW
Gain (typical)	See graph below
E-plane 3 dB beamwidth	
Band A	95º - 105°
Band B	65° - 75°
Band C	65° - 75°
H-plane 3 dB beamwidth	
Band A	55° - 65°
Band B	45° - 55°
Band C	45° - 55°
Polarisation	Linear
Front-to-back ratio	≥ 19 dB
Mechanical:	
Dimensions (I x h x w)	600 mm x 880 mm x 160 mm
· · · ·	(incl. bracket)
Material	Aluminium, stainless steel,
	fibreglass
Total mass	< 6 kg (incl. mounting bracket)
Mounting method	4 x M8 Bolts
MTBF	500,000 h
Environmental: designed	to meet the following specifications
Wind survival	160 km/h calculated
Operating Temperature	-30°C to +65° (no icing)
Storage Temperature	-40°C to +85°

PRODUCT FEATURES:

- Wideband frequency 400 to 6000 MHz
- VSWR < 2.0:1
- High gain: > 7 dBi
- Rugged construction
- Ice resistant

PRODUCT APPLICATIONS:

- Wideband
- High-Power

PRODUCT DESCRIPTION:

The LPDA-A0167 tri port directional log-periodic dipole array (LPDA) is primarily designed for high-power applications. It covers a frequency band of 400 to 6000 MHz with a gain of greater than 7 dBi.

The antenna provides three separate ports for simultaneous transmission in all bands with good isolation between bands.

The antenna is completely encapsulated in a radome. The antenna is provided with a mounting bracket.

Updated 2022-09-19

sales@alaris.co.za www.alarisantennas.com

GAIN THE ADVANTAGE


PAGE 1 of 3

Tri Port High-Power LPDA Antenna


400 – 6000 MHz Product Code: LPDA-A0167

VSWR AND GAIN GRAPHS:

Typical VSWR:

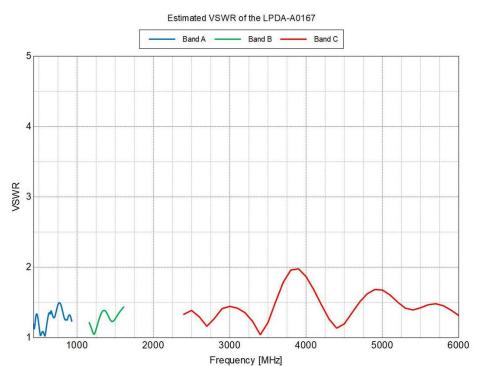

GAIN:

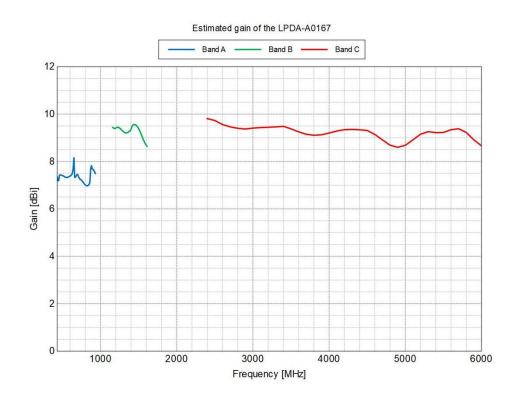

Updated 2022-09-19

sales@alaris.co.za www.alarisantennas.com

GAIN THE ADVANTAGE

VERSION: 1.1

Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice


PAGE 2 of 3

Tri Port High-Power LPDA Antenna

400 – 6000 MHz Product Code: LPDA-A0167

VERSION: 1.1

RADIATION PATTERNS:

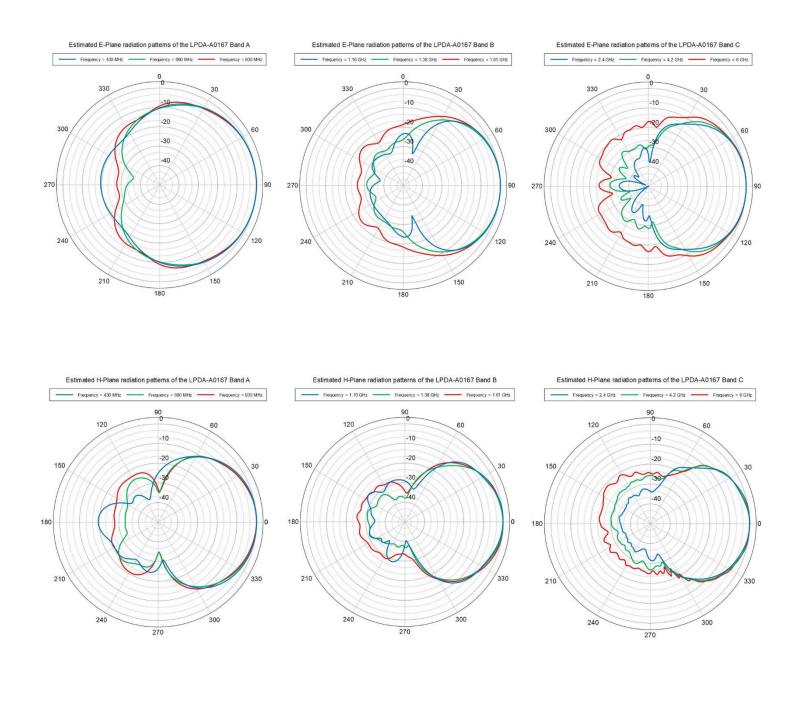

GAIN THE ADVANTAGE

sales@alaris.co.za www.alarisantennas.com

Updated 2022-09-19

Alaris Antennas has a policy of continuous improvement and hence specifications may change without notice